
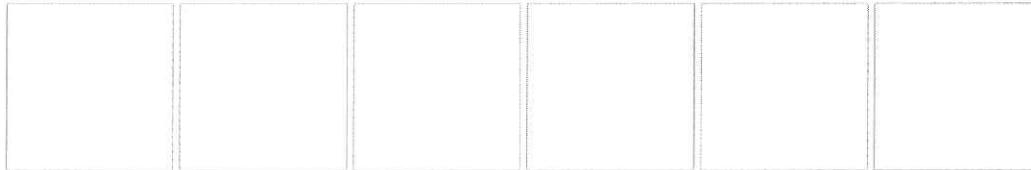


T9 506-EL / VORTEX 625-EL

Print

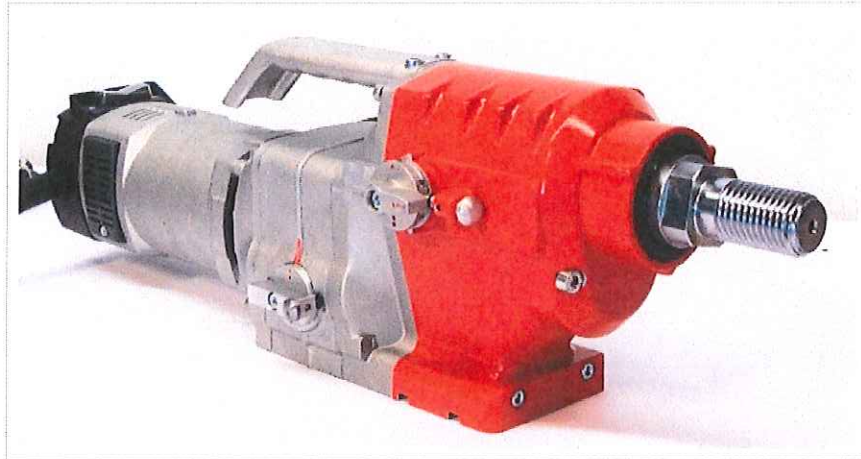

The only 6-speed core drill motor on the market! This wide range of different speeds allows to set the best speed for the application.

Technical specifications

	T9 506-EL	VORTEX 625-EL
Voltage (V)	230 / 50-60Hz	115 / 50-60Hz
Power (W)	3420	2820
Idle speed (R.P.M.)	gear I - 240 gear II - 380 gear III - 540 gear IIII - 830 gear IIIII - 1350 gear IIIIII - 1890	gear I - 210 gear II - 340 gear III - 480 gear IIII - 730 gear IIIII - 1200 gear IIIIII - 1670
Load speed (R.P.M.)	gear I - 155 gear II - 250 gear III - 350 gear IIII - 540 gear IIIII - 880 gear IIIIII - 1240	gear I - 135 gear II - 220 gear III - 315 gear IIII - 480 gear IIIII - 780 gear IIIIII - 1100
Capacity in concrete (σ)	25 ÷ 500 mm 1' ÷ 20'	25 ÷ 500 mm 1' ÷ 20'
Bit connection	1 1/4" UNC	
Mechanical clutch	brass rings	
Multifunction electronics	Soft start, electronic clutch	
Weight	17,5 Kg 39 LBS	

Use and service manuals