


Husqvarna Husqvarna WS 460

The Husqvarna WS 460 is a completely new hydraulic wall saw that has been developed for first-class performance in professional wall sawing. The well-designed saw provides a functional and very efficient working environment.



Quick connection - Using the quick connection, it is very easy to attach the saw unit to the carriage. First press the saw unit in place on the carriage, and then attach the unit using the locking device.

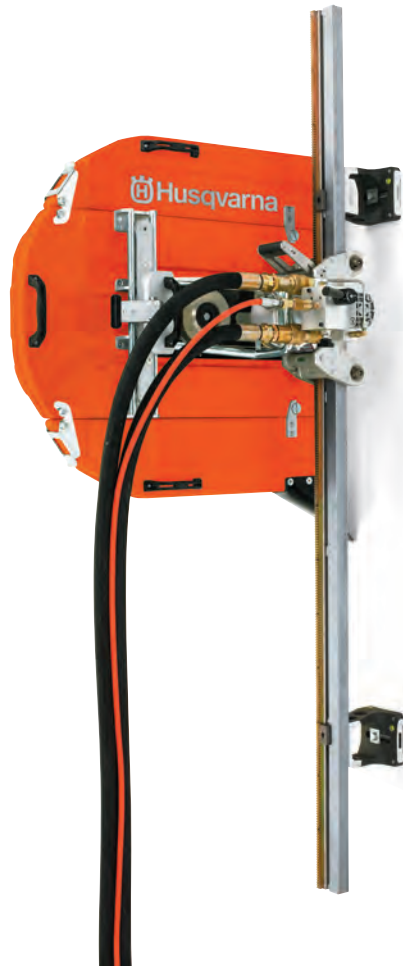

Radial connection - The saw has a radial connection on the blade that makes changing the blade extremely easy, particularly when flush cutting.



Universal mounting - The smart and flexible universal mounting is a somewhat revolutionary accessory that saves energy and time. Because the mounting pivots when positioned on the wall, it is simple to reposition the track during cutting. The mounting also means you can easily carry out dovetail cutting and stair cutting at a variety of angles.



Fully enclosed blade guard - Simply assembly of the fully enclosed blade guard allows easy set-up and is a key safety feature.

- The patented hydraulic gear makes it easy to switch spindle speed without having to stop the blade.
- The starter blade's maximum diameter of 40" (cutting depth 17") makes it extremely useful when cutting soft materials such as brick and light concrete. No pre-sawing is required.
- The swing arm can rotate 360 degrees and the maximum cutting depths is 21".
- Simple assembly of the fully enclosed blade guard allows easy set-up and is a key safety feature.
- Sturdy wall brackets and a light, symmetrical track that allows cutting on both sides are available on the 355 track.
- The blade flange, wall brackets and couplings all have the same size heads so only a socket wrench is needed.

Technical Data

SPECIFICATIONS	Husqvarna WS 460
Power requirement	17.4 hp
Weight, track section	short: 26.5 lbs; long: 41 lbs
Output RPM, position 1	800 rpm
Output RPM, position 2	1200 rpm
Blade diameter range, min-max	24-49 "
Max cutting depth	21.2 inch
Max starter blade	40 inch
Weight	112 lbs